




CA-0344

12 Pair 24 AWG Individually Jacketed Snake Cable

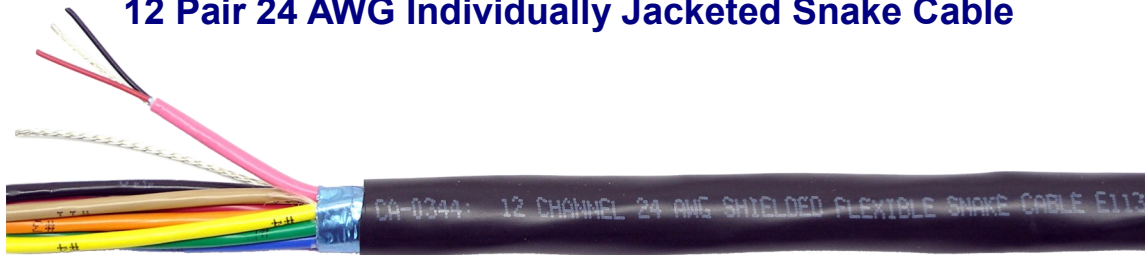

Description:

(12) 24 AWG Shielded Jacketed Twisted Pair Cable with an Overall Shield and PVC Jacket.

Construction:

Nom. O.D.

Conductor: 24 AWG 7/32 Tinned Copper .024"
Insulation: .008" wall, Polyolefin .040"
Color Code: All Pairs Red & Black

Pair: 2 Insulated Conductors Twisted Together with a Drain Wire
Drain Wire: 24 AWG 7/32 Tinned Copper

Shield: Aluminum/Polyester Fusible Tape Wrap (Aluminum Side In)

Jacket: .013" wall, PVC


Color Code: 1-Brown, 2-Red, 3-Orange, 4-Yellow, 5-Green, 6-Blue, 7-Violet, 8-Gray, 9-White, 10-Black, 11-Tan, 12-Pink

Print: Jackets Numerically Printed 1 through 12 in color order shown above.

Cable Assembly: 12 of Component A Cabled Together

Drain Wire: 18 AWG 7/26 Tinned Copper
Shield: Aluminum/Polyester Tape Wrap (Aluminum Side In)

Jacket: .045" wall, Matte Black PVC .560"

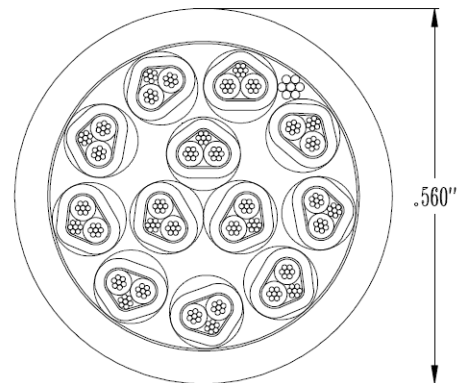

Electrical:

Impedance: 50 Ohms Nom.
Velocity of Propagation: 66% Nom.
Inductance: .18 μ H/ft Nom.
Capacitance: 31 pF/ft Nom. @ 1KHz (Conductor to Conductor)
 58 pF/ft Nom. @ 1 KHz (Conductor to Conductor and Shield)
Conductor DC Resistance: 23.3 Ohms/1000 ft

Approval:

UL listed Communications Cable Type CM

