CA-0446

Single Conductor 20 AWG Oxygen Free Shielded Audio Cable

Description

20 AWG (41/36) OFBC with Foam Low Density Polyethylene insulation and a Semi Conductive PVC covering, a Bare Copper braid shield and an overall PVC Jacket

Construction Details

Conductor:

20 AWG (41/36) Oxygen Free (99.999%) Bare Copper

Insulation:

Foam Low Density Polyethylene

Inner Shield:

Semi Conductive Black PVC

Outer Shield:

95% Minimum Coverage Bare Copper Braided

Jacket:


- Flexible Black Matte PVC
- 0.280 Nominal O.D.

Print Legend:

 BTPA.COM CA-0446: 20 AWG 95% BRAIDED SHIELD HIGH PERFORMANCE OXYGEN FREE AUDIO CABLE MADE IN THE U.S.A.

Electricals:

- Conductor DC Resistance: 10.8 Ohms/1000FT
- Capacitance Conductor to Shield: 20pF/ft

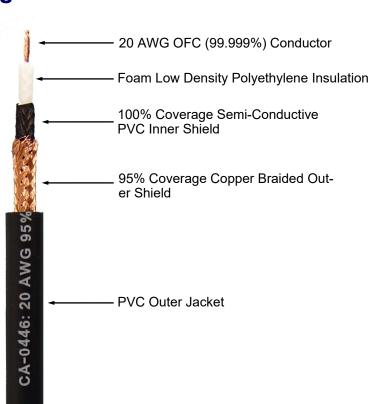



BTPA.COM